



MANURE SPREADERS

**THE SPREADERS WITH THE MOST FEATURES
AND BEST WARRANTY IN THE INDUSTRY**



Six different spreader models are available. The smaller capacity models are ground wheel driven, the larger models are P.T.O. driven. The Conestoga line of spreaders come standard with a large number of special features.

The best warranty in the industry includes "10 years" on the spreader box. Lifetime on the poly floor and apron chain. Also, these spreaders are covered for the first "3 years" for any defects in workmanship and material.



Distributed by:



13477 Benson Ave. • Chino, CA 91710
Ph: 909/548-4848 • email: sales@gearmore.com

www.gearmore.com



Manure Spreaders


KEY CONESTOGA STANDARD FEATURES UNAVAILABLE FROM THE COMPETITION ARE:

- "Cor-ten" copper bearing steel is used to provide atmospheric corrosion resistance four times that of plain carbon steel, for longer service life
- Conestoga boxes are all-welded construction, chemically washed, painted with epoxy primer, and finished with a highly corrosion resistant, two-part urethane paint
- All spreader models feature poly vinyl floors
- All Conestoga spreaders come standard with our own design, stainless steel T-rod apron chain, which provides superior durability and service life
- Beater paddles are a rooster comb design and are bolted on so they can be replaced when wear does occur
- Conestoga spreaders are designed with 12 paddles, more than the competition
- This combination of paddle design and additional paddles improves shredding action and the overall spread pattern

OUTSTANDING FEATURES ALLOWS CONESTOGA TO GIVE THE BEST WARRANTIES IN THE INDUSTRY:

- "10 Years" on the spreader box
- "Lifetime" on the poly floor and apron chain
- "3 Years" for defect in workmanship and material

Note: C-25GD & C-50GD come with upper beater as standard

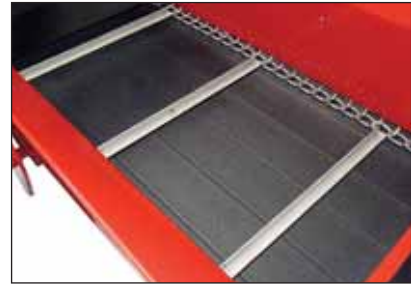

Stainless Steel T-rod apron chain and poly floor



Upper beaters standard on C-25GD and C-50GD



Dolly Wheel Jacks Standard on C-25GD and C-50GD

SPECIFICATIONS:

	C-25GD	C-50GD	C-50 PTO	C-80 PTO	C-125 PTO	C-175 PTO
Capacity, heaped	25 cu. ft.	50 cu. ft.	50 cu. ft.	80 cu. ft.	125 cu. ft.	175 cu. ft.
Number of Horses	1-5	4-6	4-6	5-10	10-25	20+
Drive	2-Wheel Ground Drive		540 RPM PTO			
Overall Length	9' 10"	12'	12'	14'	16' 6"	17' 6"
Overall Width	49.75"	60"	57"	65"	80"	87"
Loading Height	28"	33"	33"	36"	43"	45"
Tire Size	6/12 Traction	5.90/15 Traction	5.90/15 IMPL	9.50/15 IMPL	10/15 SL	11/22.5 SL
Weight	600 lbs	825 lbs	825 lbs	950 lbs	1,700 lbs	1,900 lbs

Specifications Subject To Change Without Notice

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • email: sales@gearmore.com