


**IMPLEMENTS  
FOR NARROW ROW RASPBERRIES & BLUEBERRIES**



**VENTURI AIR  
SPRAYERS**

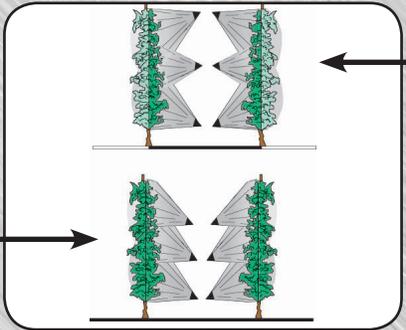

MODEL	P42 w/12 Nozzles
Minimum HP:	18 H.P.
Overall Width:	38"
Capacity:	75 Gallon

MODEL	P50 w/16 Nozzles
Minimum HP:	45 H.P.
Overall Width:	44"
Capacity:	100 Gallon

This **Venturi Air Sprayer** features the latest technology in low volume spraying. Berry growers achieve the following benefits: better coverage from a smaller and more uniform droplet size, less fill-ups, less wasted chemical, and lower maintenance costs. This special narrow sprayer was developed for low horsepower tractors operating in Hoop houses.

This **Venturi Air Sprayer** also features the same technology but for higher horsepower tractors. The fog sized droplets insures total plant coverage. The special 16 nozzle distributor head gives total foliage coverage including the underside of leaves. If your tractor has enough PTO horsepower, we recommend the P50 due to the density of the foliage.

## 3-IN-1 SOIL CONDITIONER



MODEL	GSC4
Minimum HP:	25 H.P.
Overall Width:	48"
Working Width:	48"

This **3-In-1 Soil Conditioner** combines heavy-duty "S" spring tines with 7" sweeps to break the soil. The spike tooth bar follows to level the soil and breaks up clods. Then the aggressive flexible rolling crumbler completes the work by creating a fine level surface. The 72" soil conditioner is shown.

## TANDEM DISC



MODEL	GV-5R
Minimum HP:	45 H.P.
Overall Width:	48"
Working Width:	32" to 44"

This **Tandem Disc** is excellent for knocking down weeds, leveling, and mixing in residue. The 22" notched front blades aid in cutting through hard soils, while the rear smooth blades give a smooth finish. The heavy disc weight of 1200 lbs. allows for cutting through highly compacted soil.

## FLAIL MOWER/SHREDDER



MODEL	SFG95
Minimum HP:	20 H.P.
Overall Width:	43"
Shredding Width:	38"

This **Flail Mower/Shredder** is narrow yet features a 70 HP rated gearbox. The low profile design is a great aid for working in tight areas. Excellent for mowing grasses or brush up to 2" in diameter. Shredder is available with hammer knives or double Y blades. Rake teeth are an option.

## ROW MULCHER



MODEL	204
Minimum HP:	20 H.P.
Overall Width:	48"

The Millcreek "NEW" Model 204 **Row Mulcher** was designed for narrow row vineyards and berries. In vineyards, the mulch helps retain precious soil moisture, keeps soil temperatures buffered against extremes and adds organic matter. For berry growers it obtains the same advantages, plus berries love wood chip mulch to support the acidic soil conditions they thrive on.

## COMPACT ROTARY TILLER



MODEL	B100
Minimum HP:	20 H.P.
Overall Width:	44"
Tilling Width:	40"

This **Compact Rotary Tiller** has skid shoes to control the tilling depth and the rear tailboard controls the soil mix. The tiller is equipped with a slip clutch to protect the tiller and tractor. The A.S.A.E. quick hitch is standard equipment. Designed for tractors up to a maximum of 35 PTO H.P.

## ROTARY TILLER



MODEL	C85
Minimum HP:	20 H.P.
Overall Width:	38"
Tilling Width:	34"

This **Rotary Tiller** is heavier built than the compact tiller and is narrower in width. Some of the features are slip clutch, all gear final drive, 6 tines per rotor plate, and heavy A.S.A.E. quick hitch 3-point hitch. Designed for tractors up to a maximum of 50 PTO H.P.

## COMPOST SPREADER



MODEL	SCU1000
Minimum HP:	50 H.P.
Working Width:	48"
Capacity:	2000 lbs.

This unique spreader was designed to be able to spread a wide range of materials such as - compost, peat, concentrated manure, lime, gypsum, dried grape pomace and other types of fertilizer. The spreader features a "patented" two gearbox system, one powers the spinner and a second gearbox is geared to a low RPM for the agitator. The hopper has two large shutter openings for releasing bulky material. An easy to attach band spread attachment is also available.

## AIR BLAST SPRAYER



MODEL	APL400
Minimum HP:	30 H.P.
Overall Width:	43"
Capacity:	100 Gallon

This **Air Blast Sprayer** is ideal for economy spraying. The sprayer features a reinforced polyethylene tank with smooth lines that is gentle to the plants. The tank is suspended from a heavy duty tubular steel frame to isolate from vibration and stress. The gearbox has neutral position which shuts off the fan during handgun or boom work.

## 2 ROW BAND SPREADER



MODEL	PL500-2R
Minimum HP:	30 H.P.
Overall Width:	50"
Spreading Width:	6 Feet

This **Two Row Band Spreader** is the most economical way to spread on the row line for maximum fertilizer utilization. The capacity of the spreader is 1000 lbs., with two smaller capacities available. The spreader flow rate is adjustable from 20 to 900 lbs./acre.

## V-RIPPER



MODEL	R3-50
Minimum HP:	50 H.P.
Overall Width:	50"
Ripping Depth:	16"

This **3 Shank V-Ripper** obtains excellent soil aeration, which allows greater water penetration and increases root growth. This adds up to better crops and higher profits

## PICK-UP MULCHER



MODEL	TSD115
Minimum HP:	40 H.P.
Overall Width:	51"
Shredding Width:	45"

The Gearmore 3-point hitch, P.T.O. driven, self-feeding **Pick-Up Mulchers** were designed to shred branches up to 2" in diameter in a very fine mulch. The front mounted feed rotor picks up the branches and places them on the slotted fingers. Then the finger directs the branches toward the rotor. The hammer knife rotor then shreds up the branches. Finally the material is forced through the holes in the fine mesh screen to achieve the final mulching.

*Specifications Subject To Change Without Notice*