



FLAIL MULCHERS S9C SERIES

LOW PROFILE, HYDRAULIC OFFSET



This flail mulcher has a unique hydraulic side shift system that moves horizontally on front and rear mounted heavy steel tubes. These units were designed for high usage with limited maintenance. This is achieved by a number of special features such as - high tensile steel hood, internal hood replaceable "Hardox" wear plates, replaceable drop forged re-cutter bars and large 150 horsepower gearbox. The adjustable rear hatch can be closed for maximum shredding or open for maximum speed up to 6 miles per hour.




13477 Benson Ave. • Chino, CA 91710
Ph: 909/548-4848 • Fax: 909/548-4747

www.gearmore.com • sales@gearmore.com



FLAIL MULCHERS

S9C Series Special Features

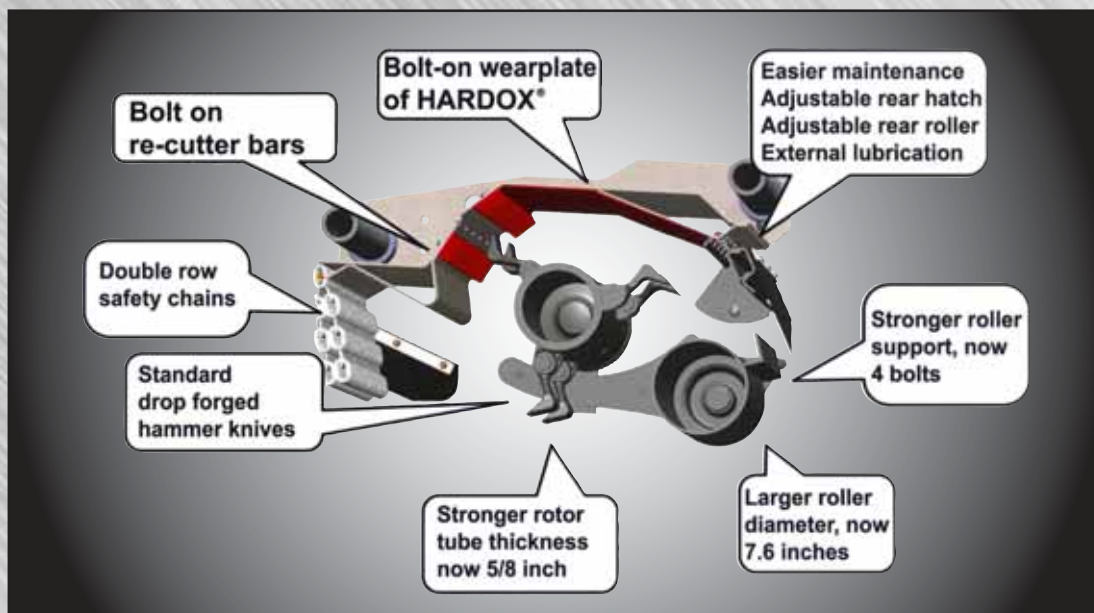

- Cat. 2, 540 R.P.M. hydraulic offset
- 150 H.P. gearbox with overrunning clutch
- Hydraulic offset - 28 inches
- Mulches grass and prunings up to 3 1/2"
- Working speeds up to 6 miles per hour
- 5 Belt final drive
- Drop forged hammer knives
- Hood assembly made of high tensile steel
- Replaceable drop forged re-cutter bars to increase material shredding
- Adjustable rear hatch - closed for maximum shredding, open for maximum speed
- Strong 1/2" thick rotor tubing
- Rotor bearings are double self-aligning

- Large 7.6" diameter adjustable rear roller
- Heavy steel final drive
- Front mounted double row of safety chains and rear mounted rubber guards

OPTION:

- ~ 1000 R.P.M. gearbox

Your Gearmore Dealer:

SPECIFICATIONS:

MODEL NUMBER	SHREDDING WIDTH	OVERALL WIDTH	MAX. OFFSET RT. OF CENTERLINE	OVERALL HEIGHT	NO. OF KNIVES	FOR TRACTORS	TOTAL WT.
S9C-200	79"	85"	67.5"	41"	21	100-150 H.P.	1940#
S9C-225	89"	95"	72.5"	41"	24	100-150 H.P.	2120#
S9C-250	98"	104"	77.5"	41"	27	100-150 H.P.	2260#
S9C-275	108"	114"	82"	41"	27	100-150 H.P.	2447#

Specifications Subject To Change Without Notice

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747