



# FLAIL MOWER/SHREDDERS SMWA-HS SERIES

## HYDRAULIC DRIVEN SKID STEER MOUNT

**seppi m.**  
MULCHING EQUIPMENT SPECIALISTS



This Mower/Shredder Series delivers excellent cutting, mulching and mowing action for material up to 1" in diameter. The mower features an automatic "STOP SAFE" system. If the mower is raised from operating position, the rotor blades "STOP" preventing objects being thrown at operator. The special floating linkage allows the mower/shredder to follow the terrain for even cut. The adjustable hydraulic motor can be set to the maximum power for skid steer's and track loaders hydraulic system. Also, the shredders can be operated while traveling in either forward or reverse. The unique rear hatch adjusts, closed for maximum shredding of brush, or open for weeds and heavy grasses. Just right for use in vineyards, berries and other narrow applications. Also, used for roadsides, parks, rental yards, and weed abatement.



Marketed by:



13477 Benson Ave. • Chino, CA 91710

Ph: 909/548-4848 • Fax: 909/548-4747


[www.gearmore.com](http://www.gearmore.com) • [sales@gearmore.com](mailto:sales@gearmore.com)



# HYDRAULIC FLAIL MOWER/SHREDDERS

## FEATURES:

- Unique "STOP SAFE" safety valve stops the rotor when lifted from operating position
- Shreds brush or prunings up to 1"
- Cutting height adjusts from 1" to 4"
- Unique floating hitch allows shredders to follow the contour of the ground
- Variable displacement piston motor
- Motor is adjustable from 16 to 39 GPM @ a maximum pressure of 3600 PSI
- Both a relief valve and uni-directional valve are standard equipment
- Support chain to carry shredder in transport
- Row of drop forged cutter bars to increase the shredding of material
- Equipped with rear deflector which in open position discharges grass and allows speeds up to 6 M.P.H., and in closed position contains and further shreds brush to a finer mulch, but at a lower speed
- Computer balanced vibration free rotor turn at approximately 2100 R.P.M.
- Deck made of high tensile steel S420
- Rotor bearings are double self-aligning to insure long life
- 4 Belt drive protects gearbox, driveshaft and rotor shaft, 3 belt on 61" model
- Front guards provide safety from flying material
- 5 1/2" diameter full width gauge roller
- Comes complete with hydraulic hoses and quick couplers

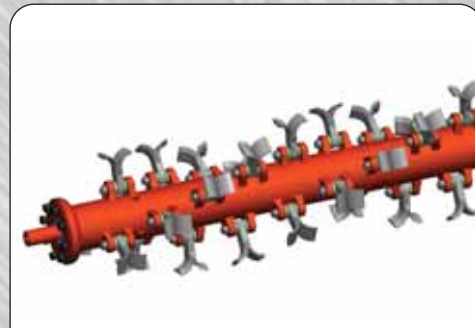

*Rotorshaft with heavy swing Y blades*



*Piston Motor w/Adjustable Gallons Per Minute*



*Adjustable Rear Deflector*

## SPECIFICATIONS:

MODEL #	MOWING WIDTH	OVERALL WIDTH	NO. OF BLADES	G.P.M. REQUIRED	WT.
SMWA155-HS	5'-1" (61")	5'-6" (66")	54	16 to 39	980#
SMWA175-HS	5'-9" (69")	6'-2" (74")	66	16 to 39	1095#
SMWA200-HS	6'-7" (79")	7'-1" (85")	78	16 to 39	1160#

*Specifications Subject To Change Without Notice*

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747