




IN-ROW CULTIVATORS

FEATURING THE NEW SPEDO BLADES

MECHANICAL WEED CONTROL FOR VINEYARDS

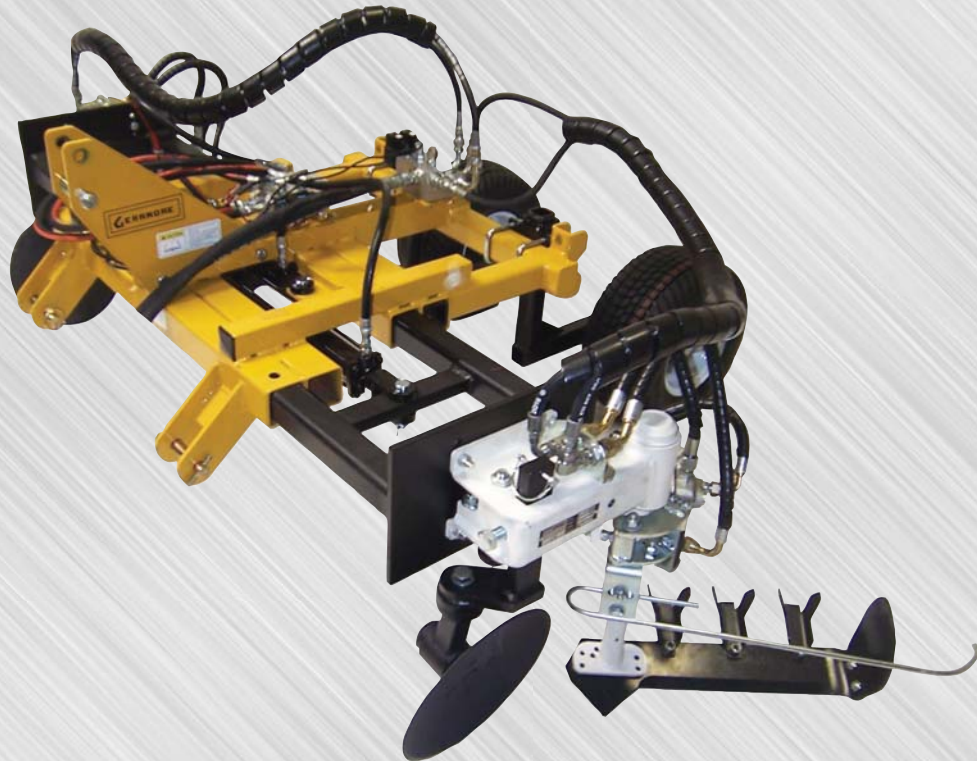

These Cultivators have hydraulically controlled in-row blades that undercut weeds while at the same time loosens and turns back soil at speeds of up to 5 miles per hour. The blades throw the weeds with the roots to the surface allowing them to rot naturally. The automatic sensor rods retract the blades when passing plants and immediately returns to working position.




The Cultivator frames are adjustable manual or hydraulically for operating in row spacings from 6 to 10 feet.

The Spedo heads can also be purchased separately for side tractor mount and easily be installed on many different tillage implements.

FEATURES:

- Cat. 1 & 2 ASAE quick hitch 3-point hitch
- Clevis lower hitch brackets
- Double extra strength dual square main frame
- Manual or dual 2" x 18" hydraulic cylinders to adjust for different row widths
- Hydraulic blade trip retraction system with sensor rod
- Sensor rod tension comes with 4 quick change springs for light to heavy rod tripping
- Harness control from tractor seat to allow for blade retraction when required
- Blades are available in lengths of 17 3/4" or 24 3/4"
- Blades are fitted with moldboard and combs for lifting weeds to the surface
- Adjustable coulter discs to cut the soil in front of the blades
- Hydraulic frames come complete with hoses and male couplers
- Hydraulic frames also come with divertor valve so only two tractor remotes are required
- Dual adjustable gauge wheels with 18 x 8.5 floatation tires
- Dual parking stands

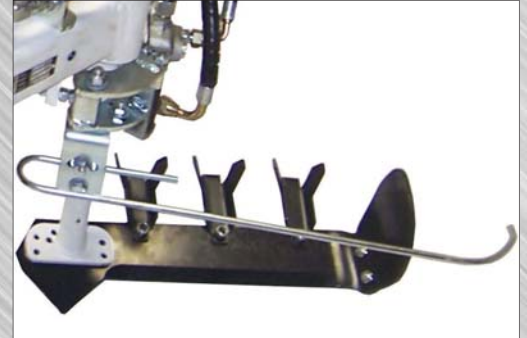

Blade with optional combs & plow



*Optional hydraulic tilt kit**



*Optional hydraulic blade lift kit**

Your Gearmore Dealer:

SPECIFICATIONS:

MODEL NUMBER	ROW WIDTH	FRAME ADJUSTMENT	NO. OF BLADES	CAT. HITCH	WEIGHT
72F-1S	6 Foot	Fixed	1	Cat. 1	310#
84M-2S	7 to 10 Foot	Manual	2	Cat. 1 & 2	750#
84H-2S	7 to 10 Foot	Hydraulic	2	Cat. 1 & 2	770#

**Note: Spedo heads are available with fixed horizontal blades, hydraulic tilt blades up to 25 degrees, hydraulic lift blades raise up to 11.8 inches*