



ROTARY TILLERS "C" SERIES

FOR TRACTORS 20 TO 50 HORSEPOWER



CAT I
A. S. A. E.
QUICK
HITCH
COMPATIBLE

This series of tillers have heavy 50 horsepower gearboxes and yet are available in tilling widths as low as 34" up to 72". A number of special features are standard at no added cost, such as; slip clutch, all gear final drive, 6 tines per rotor plate, and heavy A.S.A.E. quick hitch A-frame.

Excellent tiller for vegetable growers landscapers, nurseries, vineyards, and general maintenance operations.



GEARMORE INC.

13477 Benson Ave. • Chino, CA 91710

Ph: 909/548-4848 • Fax: 909/548-4747

www.gearmore.com • sales@gearmore.com



"C" SERIES ROTARY TILLERS


FEATURES:

- Cat. I, 3-point hitch
- A.S.A.E. quick hitch compatibility for easy hook-up
- 8" Approximate tilling depth
- One speed gearbox, 540 R.P.M.
- For tractors up to a maximum of 50 horsepower
- Strong, smooth running, all gear final drive
- Slip clutch driveshaft to protect tractor and tiller drive system
- Curved, saber style heat treated, long wearing tines
- 6 Tines mounted on each rotor plate for maximum tilling action
- Tines staggered in scroll design for easy soil penetration
- Adjustable clevis style lower hitch brackets
- Torque tube frame to absorb shock loads
- Tiller is balanced to eliminate vibration
- Chain with spring tailboard adjustment
- Large, greaseable, long wearing rotor bearings
- Powder coated, baked-on paint to reduce corrosion
- Side mounted skids for depth control
- Plated retractable parking stand

Your Gearmore Dealer



ALL GEAR FINAL DRIVE

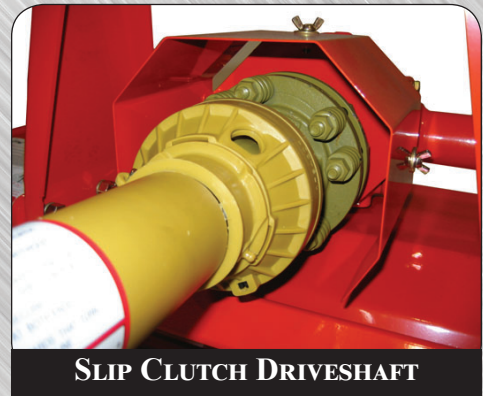

SLIP CLUTCH DRIVESHAFT



**ADJUSTABLE DEPTH CONTROL
SIDE SKIDS & PARKING STAND**

SPECIFICATIONS:

MODEL #	TILLING WIDTH	OVERALL WIDTH	NO. OF TINES	APPROX. H.P.	WEIGHT
C85	34"	38"	30	20 HP	460#
C105	42"	46"	30	25 HP	485#
C125	50"	54"	36	30 HP	510#
C145	56"	60"	36	35 HP	545#
C165	65"	69"	42	40 HP	590#
C185	72"	76"	48	45 HP	640#

Specifications Subject To Change Without Notice

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747