



# ROTARY MOWERS 200 SERIES

## STANDARD DUTY - SHEAR PIN OR SLIP CLUTCH



**CAT I  
A. S. A. E.  
QUICK  
HITCH  
COMPATIBLE**

*60" Mower with Optional  
Chain Shielding Shown*

Our 200 Series Mowers feature round back design for easy maneuvering in tight corners, around trees, fences, and other obstructions. The rounded rear opening also allows for more even distribution of exiting material. All seams on the decks are fully welded for added strength and to prevent rust.

The flexible floating hitch follows the contour of the terrain without putting stress on the mower and tractor. Also, hitch is designed to A.S.A.E. quick hitch standards for easy hook-up to tractor with a quick hitch system.

The special baked on, powder coated, corrosion resistant paint insures excellent appearance for years.



13477 Benson Ave. • Chino, CA 91710  
Ph: 909/548-4848 • Fax: 909/548-4747

[www.gearmore.com](http://www.gearmore.com) • [sales@gearmore.com](mailto:sales@gearmore.com)





# ROTARY MOWERS 200 SERIES

## FEATURES:

- Cuts up to 1" diameter material
- Flexible floating hitch follows the contour of the terrain, thus reducing stress on tractor and mower
- Two 2" x 2" full length angles for main deck support
- Heavy spindle pan guard
- Reinforced gearbox mounting plate
- Integral PTO shaft storage bracket to keep from getting contaminated
- Shielded series 4 PTO shaft
- Grade 5 plated hardware
- Powder coated paint
- Optional rubber or chain safety shielding
- Unique mower stand to aid in shipping, storage, & display


**WARNING:** If operating mower near roads and/or where people are present, you must equip mower with deck shielding.



*Heavy 1/4" Thick Beveled Spindle Guard*



*Flexible Floating Hitch*

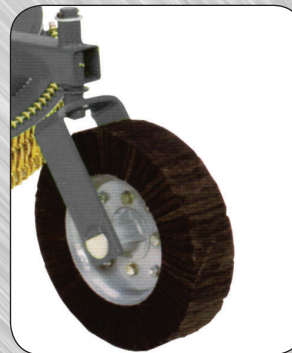

*Large Laminated Tailwheel*



*Round Back Design*

Your Gearmore Dealer

## SPECIFICATIONS:

Hitch: Cat. 1, A.S.A.E. Quick Hitch

Gearbox: 540 RPM, 40 H.P.

Deck Thickness: 11 Gauge

Deck Depth: 7 1/2"

Side Skids: Full Length

Tailwheel: 3 3/4" x 15" Laminated

Cutting Height: 1" to 9"

Blade Size: 1/2" x 3"

Blade Pin: 1 1/2" Diameter

Driveshaft: Shear Pin Protection or Slip Clutch

Model Number:	Cutting Width	Overall Width	Overall Length	Blade Tip Speed - FPM	Weight
RC200-48	48"	52"	85"	13,090	510#
RC200-60	60"	63"	98"	14,335	585#
RC200-72	72"	76"	110"	14,955	710#

*Specifications Subject To Change Without Notice*

13477 Benson Ave. • Chino, CA 91710 • Ph: 909/548-4848 • Fax: 909/548-4747